



Bon Bons

CONTRACT CARPET TILES

Sweets
Collection
By Flooring Industries

Product description

Bon Bons

Bon Bons

- ◆ **Bon Bons** carpet tile are a premium quality, cut pile design, which brings together 24 colours in the latest colour trends. Bon Bons has a luxury feel and the wonderful the handle of wool with all its environmental benefits of being from a sustainable and natural resource. This product has a hard twist texture that achieves an outstanding luxury broadloom effect when installed. The product is manufactured using only British wool for its durability in a four ply yarn that achieves out standing durability and nothing is better than wool for its natural soil hiding benefits. This product is suitable for a wide range of heavy contract locations including offices.
- ◆ **Bon Bons** is a made to order product with a minimum order of 50m2 and is available within three weeks from time of order. All our products are available for delivery being supplied to a net work of dealers through out the United Kingdom, or via our website @ www.flooringindustries.co.uk

Usages

- ◆ Offices
- ◆ Schools
- ◆ Universities
- ◆ Public Buildings
- ◆ Retail shops and outlets
- ◆ Hospitality Leisure
- ◆ Hotels...

Bon Bons



CT18



CT08



CT04




CT16



CT23



CT15

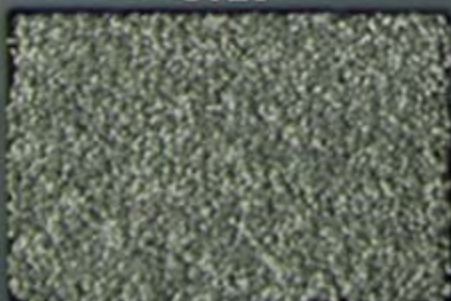

CT10



CT21

Bon Bons




CT24



CT17




CT20

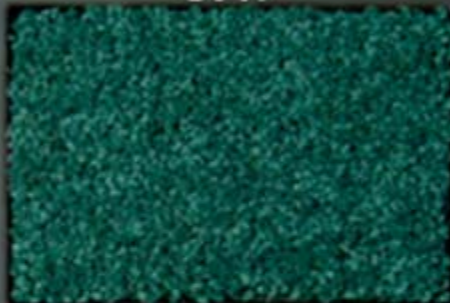

CT11



CT14

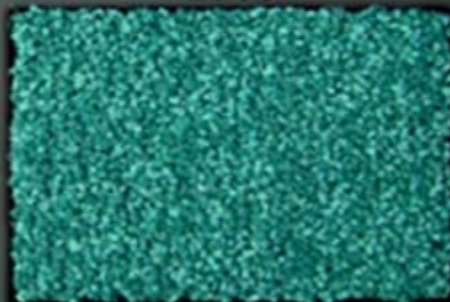

CT06



CT13



CT02

Bon Bons




CT22




CT07



CT01

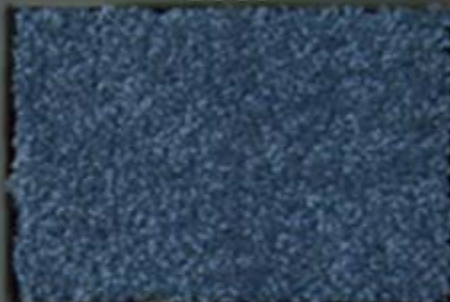


CT09

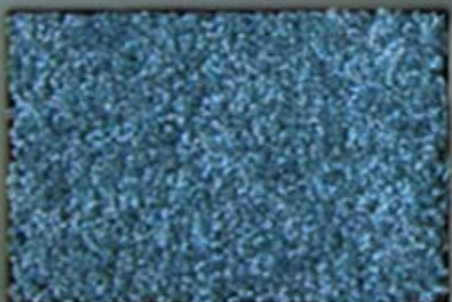


CT19



CT05

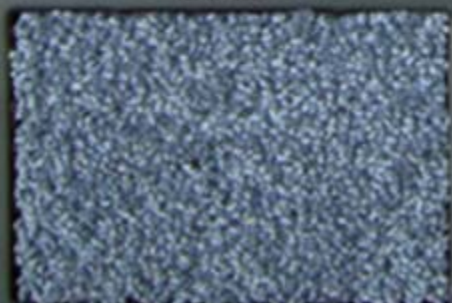

CT03

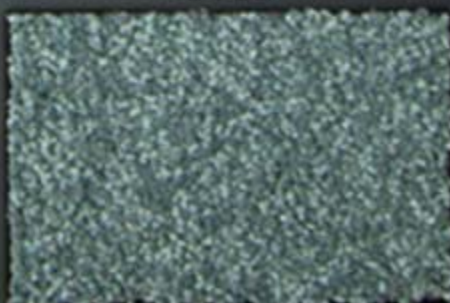

CT12

Technical Specification

Bon Bons

- ◆ 1st April 2007
- ◆ Warranty
- ◆ 10 years subject to
- ◆ Flooring Industries Conditions
- ◆ Construction.
- ◆ 1/8th gauge cut pile twist
- ◆ 80% British Wool 20% Nylon
- ◆ Total Weight.
- ◆ 5.0kgs sq. mt. (Nom)
- ◆ Pile Weight.
- ◆ 1424gms.sq.mt. (Nom)
- ◆ Backing.
- ◆ Bitumen with Glass fibre
- ◆ Dimensions.
- ◆ Pile height 6.5 (Nom)
- ◆ Total height 10.5mm (Nom)
- ◆ Tile size 50cm x 50cm
- ◆ Dimensional Stability.
- ◆ EN989. MAX -0.4%
- ◆ Colour Fastness.
- ◆ EN ISO 105-B02/ X12/ E01
- ◆ Light <5 Rubbing >4 Water >4
- ◆ Static.
- ◆ Body Voltage pass <2KV @ 25%RH
- ◆ Surface Resistance: <10¹² ohm.
- ◆ Flammability.
- ◆ Euroclass B suitable for
- ◆ Commercial buildings

Comfort.

- ◆ EN1307 Luxury rating LC4

Acoustic.

- ◆ ISO 140-8 30db

Usage.

- ◆ EN1307: 3
- ◆ Heavy Contract

Castor Test.

- ◆ En1307 rating 2.9
- ◆ A continuous use

Thermal Resistance

- ◆ Suitable for Underfloor Heating

Environmentally

- ◆ Environmentally compatible production emissions, recycled waste & water, minimal odours and waste; yarns from a sustainable source.

Installation

- ◆ Install to BS5325, CFA: best practice guide. Broadloom or Tessellated
- ◆ We reserve all rights for technical improvements

Bon Bons

Installation Specification

Flooring Industries Installation Specification

Product:

Bon Bons 50x50cm x 7.4mm thick bitumen backed carpet tiles manufactured 100% PA Antron. Available in 24 colour ways

Preparation:

- ◆ Installation should be carried out in accordance with the recommendations detailed in British Standard Code of Practice for Installation of Textile Floor coverings BS 5325: 1983 (or any revision of this standard). It is also recommended that the installation should be in accordance with The Contract Flooring Association Manual for Installation of Textile Floor coverings (October 1989). If surface tackifiers or other adhesives are to be used, the adhesive manufacturer's guidelines with reference to the Control of Substances Hazardous to Health (COSHH) Regulations and Section 6 of the Health and Safety at Work Act 1974 (as amended by the Consumer Protection Act 1987) should be consulted. Before commencing to lay tiles check that they are from the same batch number, which is stamped on the back of each tile. It is important that batches are not mixed as shades may vary from batch to batch.

Surface Preparation

- ◆ The floor should be clean, level, dry and free from any contaminants such as oil, grease and polish. A new concrete slab should have moisture content, when measured with a hygrometer, less than 75% relative humidity.
- ◆ Dusty floors and surfaces that are very absorbent should be swept clean and the surface sealed with an approved sealer. The sealer should be allowed to dry before the application of any tackifier or adhesive system.
- ◆ Concrete screeds should be sound and any damaged areas or holes should be made good using an approved screeding material.
- ◆ Vinyl tiles should be firmly adhered to the floor and all surface treatments should be removed prior to the application of the tackifier.
- ◆ Floorboards should be level and firmly fixed. Uneven surfaces should be levelled by the application of hardboard or plywood, and the latter may require sealing to prevent the absorption of applied tackifier

- ◆ **Application of surface tackifier**

- ◆ In all Installations it is recommended that an all-over surface tackifier method should be used. We recommend an anti-slip surface tackifier such as F.Ball Styccobond F41 applied using a roller and tray. This method ensures that the correct amount of adhesive is applied and avoids over-application, which may cause problems with raised floor panels and timber floors. Never pour surface tackifier directly from the drum onto a raised flooring system. The tackifier must be allowed to dry to clear tacky film in accordance with the manufacturers instructions. Under no circumstances must the tiles be laid in wet tackifier.

- ◆ **Recommended Materials**

- ◆ Flooring Industries Ltd recommends the following materials: -

- ◆ Tackifier F41

- ◆ Sealer F70

- ◆ Screeding Stopgap Powder/Liquid system as appropriate

- ◆ Surface cleaner Styccoclean

- ◆ Fabricated underlay:

- ◆ See Flooring Industries Installation guide Surface Preparation timber Floors only if required

- ◆ Carpet Tiles

- ◆ Tufted carpet tiles Bitumen backing with glass fibre non-woven fleece

- ◆ Carpet Manufacture and reference:

- ◆ Flooring Industries Ltd P.O Box 290 Watford Hertfordshire WD24 7LA Telephone no. 01923 211151 Fax no. 01923 818564

- ◆ **Reference:**

- ◆ Bon Bons

- ◆ Type:

- ◆ Type N carpet tiles

- ◆ Classification:

- ◆ BS EN1307 LC1 Grade 3 Commercial

- ◆ Width:

- ◆ 50x 50 cm

- ◆ Height:

- ◆ 7.4 mm

- ◆ Colour Pattern:

- ◆ For complete technical literature or samples phone

- ◆ 01923 211151 or Email: sales@flooringindustries.co.uk