



Magic Mints

CONTRACT CARPET TILES

Sweets
Collection
By Flooring Industries

Product description

Magic Mints

- ◆ **Magic Mints** is tufted cut pile velour, which brings a touch of luxury at a budget. With over 24 inspirational colours to choose from in a range of soft textures and complimentary colours to strong accents there is something for the modern office interior with its calm understated visual appearance. Magic Mints has a dense close surface is ideal for use in corridors stairs circulation areas and boardrooms. Magic Mints can be laid broadloom creating an outstanding broadloom effect on high quality finish. The product is manufactured from solution dyed Alto Cromax with its proven reputation for durability and good soil hiding properties. This product is a highly cost effective choice when considering luxury at a modest budget. This product is ideally suited for a wide range of commercial locations.
- ◆ Magic Mints is a standard stock product and readily available for delivery being supplied to a net work of dealers through out the United Kingdom, via our website @ www.flooringindustries.co.uk

Usages

- ◆ Offices
- ◆ Schools
- ◆ Universities
- ◆ Public Buildings
- ◆ Banks
- ◆ Shops and outlets

Magic Mints



Lundy Blue



Deeper Navy



Twilight Green



Blue Lagoon



Deep Waters



Slate Blue



Frozen Grape



English Blue

Magic Mints



Desert Sun



Wild Cherry



Adobe



Wine




Gold



Plum



Mountain Wood

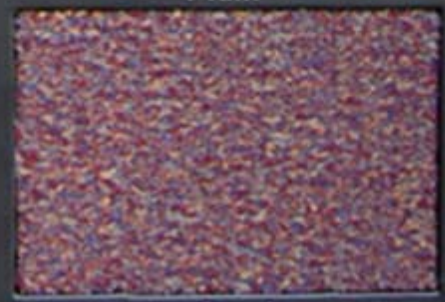

Coral

Magic Mints



Smokey Mountain



Coffee



Marsh Wood



Cinnamon



Willow



Mineralite



Canvas



Smokey Beige

Technical Specification

Magic Mints

1st March 2005

Construction.

- ◆ 1/10 Gauge Cut plain velour
- ◆ Solution dyed AltoCroma.

Total Weight.

- ◆ 4.75 kgs sq. mt. (Nom)

Pile Weight.

- ◆ 750gms sq.mt. (Nom)

Backing.

- ◆ Bitumen with Glass fibre

Dimensions.

- ◆ Pile Height 3.9 mm (Nom)
- ◆ Total Height 7.5 mm (Nom)
- ◆ Tile size 50cm x 50cm

Dimensional Stability.

- ◆ EN989. Max -0.2%

Colour Fastness.

- ◆ EN ISO 105-B02/ x12/ E01
- ◆ Light: 7 Water: 4-5 Rubbing: 4-5

Flammability.

- ◆ EN ISO 9239-1

Static.

Permanently antistatic:

- ◆ PrEN 1815 <2KV
- ◆ Transversal resistance
- ◆ ISO/DIS 10965 109 Ohm

Comfort.

- ◆ EN1307 Luxury rating LC2

Usage.

- ◆ EN1307: 3 Heavy contract

Castor Test.

- ◆ En1307 rating 3.2
- ◆ Class A continuous use

Acoustic.

- ◆ ISO 140-8 25db
- ◆ ISO 354 Request full results

Environmental:

- ◆ Compatible production.
- ◆ GUT20631 Minimal odours
- ◆ And emissions, recycled waste.

Installation

- ◆ Install to BS5325, CFA: best practice guide. Broadloom or Tessellated
- ◆ We reserve all rights for technical improvements.

Magic Mints Installation Specification

- ◆ **Magic Mints** 50x50cm x 8.0mm thick bitumen backed carpet tiles manufactured 100% Anso performa. Available in 24 standard colour ways
- ◆ **Preparation:**
- ◆ Installation should be carried out in accordance with the recommendations detailed in British Standard Code of Practice for Installation of Textile Floorcoverings BS 5325: 1983 (or any revision of this standard). It is also recommended that the installation should be in accordance with The Contract Flooring Association Manual for Installation of Textile Floorcoverings (October 1989). If surface tackifiers or other adhesives are to be used, the adhesive manufacturer's guidelines with reference to the Control of Substances Hazardous to Health (COSHH) Regulations and Section 6 of the Health and Safety at Work Act 1974 (as amended by the Consumer Protection Act 1987) should be consulted. Before commencing to lay tiles check that they are from the same batch number, which is stamped on the back of each tile. It is important that batches are not mixed as shades may vary from batch to batch.
- ◆ **Surface Preparation**
- ◆ The floor should be clean, level, dry and free from any contaminants such as oil, grease and polish. A new concrete slab should have moisture content, when measured with a hygrometer, less than 75% relative humidity.
- ◆ Dusty floors and surfaces that are very absorbent should be swept clean and the surface sealed with an approved sealer. The sealer should be allowed to dry before the application of any tackifier or adhesive system.
- ◆ Concrete screeds should be sound and any damaged areas or holes should be made good using an approved screeding material.
- ◆ Vinyl tiles should be firmly adhered to the floor and all surface treatments should be removed prior to the application of the tackifier.
- ◆ Floorboards should be level and firmly fixed. Uneven surfaces should be levelled by the application of hardboard or plywood, and the latter may require sealing to prevent the absorption of applied tackifier

Application of surface tackifier

- ◆ In all Installations it is recommended that an all-over surface tackifier method should be used. We recommend an anti-slip surface tackifier such as F.Ball Styccobond F41 applied using a roller and tray. This method ensures that the correct amount of adhesive is applied and avoids over-application, which may cause problems with raised floor panels and timber floors. Never pour surface tackifier directly from the drum onto a raised flooring system. The tackifier must be allowed to dry to clear tacky film in accordance with the manufacturer's instructions. Under no circumstances must the tiles be laid in wet tackifier.

Recommended Materials

- ◆ Flooring Industries Ltd recommends the following materials: -
- ◆ Tackifer F41
- ◆ Sealer F70
- ◆ Screeding Stopgap Powder/Liquid system as appropriate
- ◆ Surface cleaner Styccoclean
- ◆ Fabricated underlay:
- ◆ See Flooring Industries Installation guide Surface Preparation timber Floors only if required
- ◆ Carpet Tiles
- ◆ Tufted carpet tiles Bitumen backing with glass fibre non-woven fleece
- ◆ Carpet Manufacture and reference:
- ◆ Flooring Industries Ltd P.O Box 290 Watford Hertfordshire Wd24 7LA Telephone no. 01923 211151 Fax no. 01923 818564

Reference:

- ◆ Magic Mints
- ◆ Type:
- ◆ Type N carpet tiles
- ◆ Classification:
- ◆ BS EN1307 LC3 Grade 3 Heavy Commercial
- ◆ Width:
- ◆ 50x 50 cm
- ◆ Height:
- ◆ 7.5 mm
- ◆ Colour Pattern:
- ◆ For complete technical literature or samples phone
- ◆ **01923 211151** or Email: sales@flooringindustries.co.uk