



# **Rhubarb & Custard**

**CONTRACT CARPET TILES**

***Sweets***  
**Collection**  
By Flooring Industries

# Product description

## Rhubarb & Custard

- ◆ Rhubarb & Custard carpet tiles are a Linear sculpture plain design, which brings together some of the latest trends in colour, and features two beautiful metallic high light colours. Rhubarb & Custard has a sophisticated texture that can either broadloom or be laid quarter turn, or brick. The product is manufactured of the latest patented Antron yarns; these achieve outstanding soil hiding, and durability making the product suitable for most heavy contract locations.

- ◆ [www.flooringindustries.co.uk](http://www.flooringindustries.co.uk)

### **Usages**

- ◆ Offices
- ◆ Schools
- ◆ Universities
- ◆ Public Buildings
- ◆ Retail shops, outlets

# Rhubarb & Custard



**Black Hole**



**Evening Sky**



**Mid Brown**



**Night Sky**



**Aubergine**



**Olive**



**Teal**



**Ocean**



**Fawn**



**Steel Grey**



**Plum**



**Sable**

# Rhubarb & Custard




Gold



Silver

# Rhubarb & Custard

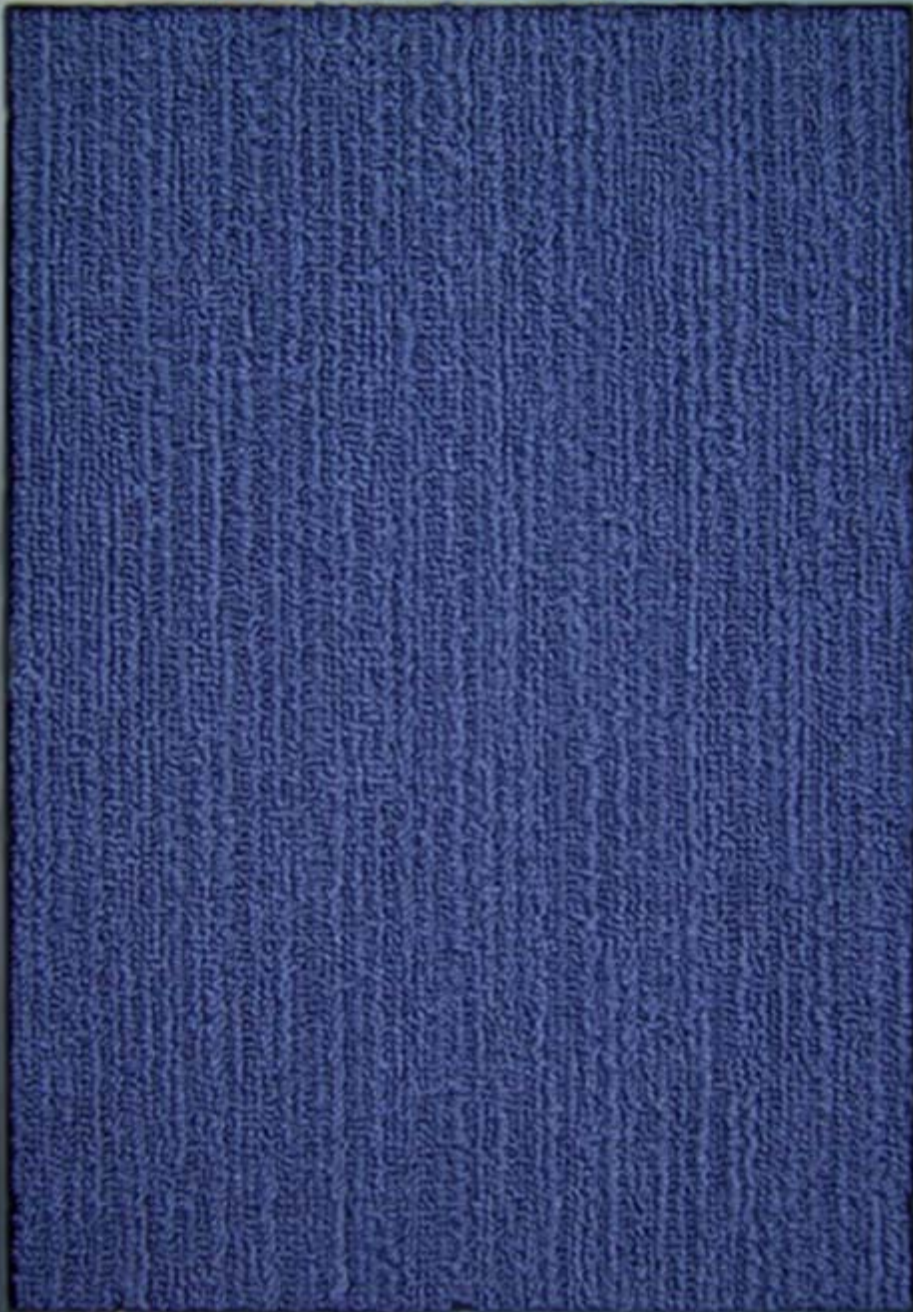

Fortune Inviting

# Technical Specification

## Rhubarb & Custard Carpet Tiles

- ◆ 1st June 2008
- ◆ Warranty  
10 years subject to Flooring Industries Conditions
- ◆ Construction  
FRS tufted loop, Antron Excel SC SDN.
- ◆ Total Weight  
4.8kgs sq. mt. (Nom)
- ◆ Pile Weight  
700gms sq.mt. (Nom)
- ◆ Backing  
Bitumen with Glass fibre
- ◆ Dimensions  
Pile Height 4.5mm (Nom), Total Height 7.4mm (Nom),  
Tile size 50cm x 50cm
- ◆ Dimensional Stability  
EN989. Max -0.2%
- ◆ Colour Fastness  
EN ISO 105-B02/ x12/ E01, Light: 7, Water 4-5, Rubbing 4-5
- ◆ Static  
Permanently antistatic: PrEN 1815 <2Kv  
Surface Resistance: BS ISO/DIS 10965: 1998 (2005) 109ohms.
- ◆ Flammability  
NFP 92-506 M3
- ◆ Comfort EN1307 Luxury rating LC2
- ◆ Usage  
EN1307: 3 Commercial Use
- ◆ Castor Test  
En1307 rating A continuous use
- ◆ Thermal Resistance  
Suitable for Underfloor Heating
- ◆ Environmentally  
Compatible production Emissions, recycled waste. Minimal odours and waste
- ◆ Installation  
Install to BS5325, CFA: best practice guide. Broadloom or Tessellated
- ◆ We reserve the right to improve and change the specification of the product without notification

# Rhubarb & Custard Installation Specification

## Flooring Industries Installation Specification

### Product:

**Rhubarb & Custard** 50x50cm x 7.4mm thick bitumen backed carpet tiles manufactured 100% PA Antron. Available in 15 colour ways

### Preparation:

Installation should be carried out in accordance with the recommendations detailed in British Standard Code of Practice for Installation of Textile Floor coverings BS 5325: 1983 (or any revision of this standard). It is also recommended that the installation should be in accordance with The Contract Flooring Association Manual for Installation of Textile Floor coverings (October 1989). If surface tackifiers or other adhesives are to be used, the adhesive manufacturer's guidelines with reference to the Control of Substances Hazardous to Health (COSHH) Regulations and Section 6 of the Health and Safety at Work Act 1974 (as amended by the Consumer Protection Act 1987) should be consulted. Before commencing to lay tiles check that they are from the same batch number, which is stamped on the back of each tile. It is important that batches are not mixed as shades may vary from batch to batch.

### Surface Preparation

- ◆ The floor should be clean, level, dry and free from any contaminants such as oil, grease and polish. A new concrete slab should have moisture content, when measured with a hygrometer, less than 75% relative humidity.
- ◆ Dusty floors and surfaces that are very absorbent should be swept clean and the surface sealed with an approved sealer. The sealer should be allowed to dry before the application of any tackifier or adhesive system.
- ◆ Concrete screeds should be sound and any damaged areas or holes should be made good using an approved screeding material.
- ◆ Vinyl tiles should be firmly adhered to the floor and all surface treatments should be removed prior to the application of the tackifier.
- ◆ Floorboards should be level and firmly fixed. Uneven surfaces should be levelled by the application of hardboard or plywood, and the latter may require sealing to prevent the absorption of applied tackifier

- ◆ **Application of surface tackifier**
- ◆ In all Installations it is recommended that an all-over surface tackifier method should be used. We recommend an anti-slip surface tackifier such as F.Ball Styccobond F41 applied using a roller and tray. This method ensures that the correct amount of adhesive is applied and avoids over-application, which may cause problems with raised floor panels and timber floors. Never pour surface tackifier directly from the drum onto a raised flooring system. The tackifier must be allowed to dry to clear tacky film in accordance with the manufacturers instructions. Under no circumstances must the tiles be laid in wet tackifier.

- ◆ **Recommended Materials**

- ◆ Flooring Industries Ltd recommends the following materials: -

- ◆ Tackifier F41
- ◆ Sealer F70
- ◆ Screeding Stopgap Powder/Liquid system as appropriate
- ◆ Surface cleaner Styccoclean
- ◆ Fabricated underlay:
- ◆ See Flooring Industries Installation guide Surface Preparation timber Floors only if required
- ◆ Carpet Tiles
- ◆ Tufted carpet tiles Bitumen backing with glass fibre non-woven fleece
- ◆ Carpet Manufacture and reference:
- ◆ Flooring Industries Ltd P.O Box 290 Watford Hertfordshire Wd24 7LA Telephone no. 01923 211151 Fax no. 01923 818564

- ◆ **Reference:**

- ◆ Rhubarb & Custard
- ◆ Type:
- ◆ Type N carpet tiles
- ◆ Classification:
- ◆ BS EN1307 LC1 Grade 3 Commercial
- ◆ Width:
- ◆ 50x 50 cm
- ◆ Height:
- ◆ 7.4 mm
- ◆ Colour Pattern:
- ◆ For complete technical literature or samples phone
- ◆ 01923 211151 or Email: [sales@flooringindustries.co.uk](mailto:sales@flooringindustries.co.uk)