



Sherbet Pips

CONTRACT CARPET TILES

Sweets
Collection
By Flooring Industries

Product description


Sherbert Pips

- ◆ **Sherbert Pips** is a practical structured loop pile carpet tile that gives texture quality and comfort in a range of 18 practical colours, ideally suited to a modern office interior. Sherbert Pips has an extremely flexible dyeing procedure meaning that Flooring Industries can dye to order thus personalising any cooperate interior. Sherbet Pips can be either laid broadloom or quarter turned with a high quality finish once installed. Sherbert Pips is manufactured from the well-respected Aquafil Altro 6 yarn with its excellent soil hiding properties, and resistance to abrasion thus assuring that carpets good looks when properly maintained. Sherbert Pips are suitable for a wide range of commercial locations and is particular popular for use in office accommodation by corporate end users and the public authority sector.
- ◆ Sherbet Pips is a standard stock product and readily available for delivery being supplied to a net work of dealers through out the United Kingdom, via our website @ www.flooringindustries.co.uk

Usages

- ◆ Offices
- ◆ Schools
- ◆ Universities
- ◆ Public Buildings
- ◆ Banks


Sherbet Pips

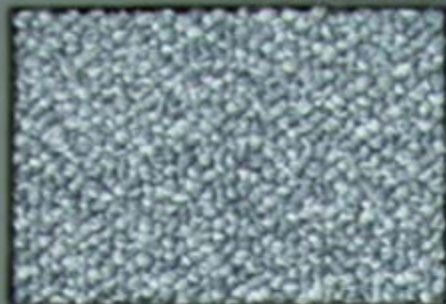

Russian Sky



Garnet Rose

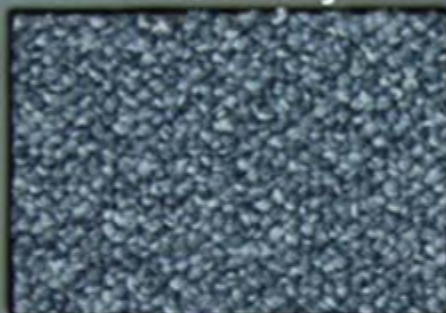

Shadow Mist



Grape



Regal Blue



Winter Sky



Bay Blue



Deeper Navy

Sherbet Pips




Smokey Beige




Wheat



Adobe

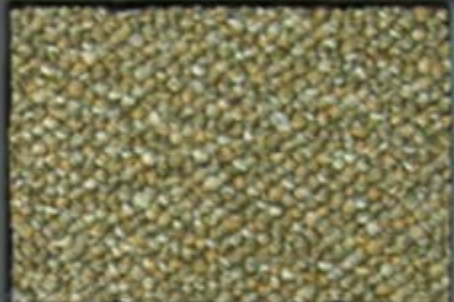


Autumn Green

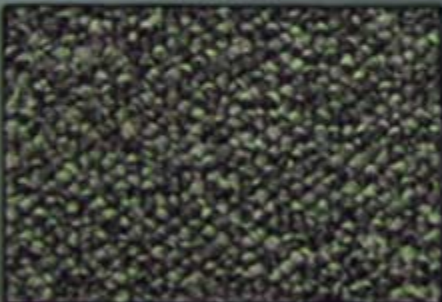

Green Camouflage



Grass

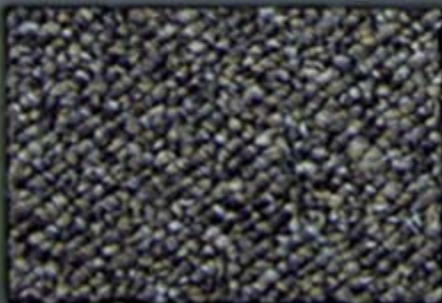

Smokey Mount




Burgundy

Sherbet Pips



Dove

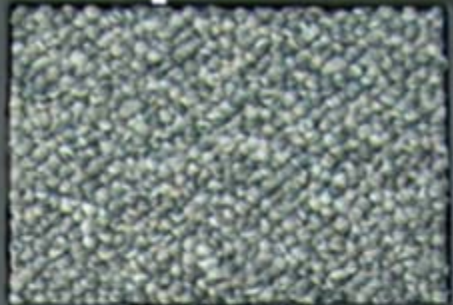

Dove Grey



Mountain Wood



Grey Mountain



Walnut



Marshwood



Bark



Graphite

Technical Specification

Sherbet Pips

◆ 1st March 2005

Warranty

◆ 10 years subject to

◆ Flooring Industries Conditions

Construction.

◆ 1/10 Gauge Loop

◆ 100% Aquafil Altro Cromax

Total Weight.

◆ 4.9 kgs sq. mt. (Nom)

Pile Weight.

◆ 730gms sq.mt. (Nom)

Backing.

◆ Bitumen with Glass fibre

Dimensions.

◆ Pile Height 3.5 mm (Nom)

◆ Total Height 7.1 mm (Nom)

◆ Tile size 50cm x 50cm

Dimensional Stability.

◆ EN989. Max -0.2%

Colour Fastness.

◆ EN ISO 105-B02/ x12/ E01

◆ Light: 5 Water: 4-5 Rubbing: 4

Flammability.

◆ NFP 92-506 M3: NBN S21-203 A3

◆ DIN 4102: B1 P-MPA-E-01-645

Static.

◆ Permanently antistatic:

◆ PrEN 1815 <2KV

◆ Transversal resistance

◆ ISO/DIS 10965 <1010 Ohm

Comfort.

- ◆ EN1307 Luxury rating LC3

Usage.

- ◆ EN1307: 4 Heavy contract

Castor Test.

- ◆ En1307 rating 3.2
- ◆ Class A continuous use

Acoustic.

- ◆ ISO 140-8 In 28 db.
- ◆ ISO 354 request full results

Thermal Resistance

- ◆ ISO 8302: Thermal Resistance 0.057 qm K/W
- ◆ Suitable for Underfloor Heating

Environmental:

- ◆ Compatible production.
- ◆ GUT20631 Minimal odours
- ◆ And emissions, recycled waste.

Installation

- ◆ Install to BS5325, CFA: best practice guide. Broadloom or Tessellated

Flooring Industries Ltd

- ◆ We reserve all rights for technical improvements.

Sherbet Pips

Installation Specification

Flooring Industries Installation Specification

Product:

- ◆ Sherbet Pips 50x50cm x 6.8mm thick bitumen backed carpet tiles manufactured 100% Solution Dyed AltoChroma, and available in 18 standard colours from stock.

Preparation:

- ◆ Installation should be carried out in accordance with the recommendations detailed in British Standard Code of Practice for Installation of Textile Floorcoverings BS 5325: 1983 (or any revision of this standard). It is also recommended that the installation should be in accordance with The Contract Flooring Association Manual for Installation of Textile Floorcoverings (October 1989). If surface tackifiers or other adhesives are to be used, the adhesive manufacturer's guidelines with reference to the Control of Substances Hazardous to Health (COSHH) Regulations and Section 6 of the Health and Safety at Work Act 1974 (as amended by the Consumer Protection Act 1987) should be consulted. Before commencing to lay tiles check that they are from the same batch number, which is stamped on the back of each tile. It is important that batches are not mixed as shades may vary from batch to batch.

Surface Preparation

- ◆ The floor should be clean, level, dry and free from any contaminants such as oil, grease and polish. A new concrete slab should have moisture content, when measured with a hygrometer, less than 75% relative humidity.
- ◆ Dusty floors and surfaces that are very absorbent should be swept clean and the surface sealed with an approved sealer. The sealer should be allowed to dry before the application of any tackifier or adhesive system.
- ◆ Concrete screeds should be sound and any damaged areas or holes should be made good using an approved screeding material.

- ◆ Vinyl tiles should be firmly adhered to the floor and all surface treatments should be removed prior to the application of the tackifier.
- ◆ Floorboards should be level and firmly fixed. Uneven surfaces should be levelled by the application of hardboard or plywood, and the latter may require sealing to prevent the absorption of applied tackifier

Application of surface tackifier

- ◆ In all Installations it is recommended that an all-over surface tackifier method should be used. We recommend an anti-slip surface tackifier such as F.Ball Styccobond F41 applied using a roller and tray. This method ensures that the correct amount of adhesive is applied and avoids over-application, which may cause problems with raised floor panels and timber floors. Never pour surface tackifier directly from the drum onto a raised flooring system. The tackifier must be allowed to dry to clear tacky film in accordance with the manufacturers instructions. Under no circumstances must the tiles be laid in wet tackifier.

Recommended Materials

- ◆ Flooring Industries Ltd recommends the following materials:
- ◆ **Tackifer** F41
- ◆ **Sealer** F70
- ◆ **Screeding** Stopgap Powder/Liquid system as appropriate
- ◆ Surface cleaner Styccoclean
- ◆ Fabricated underlay:
- ◆ See Flooring Industries Installation guide Surface Preparation timber Floors only if required

Carpet Tiles

- ◆ Tufted carpet tiles Bitumen backing with glass fibre non-woven fleece
- ◆ Carpet Manufacture and reference:
- ◆ Flooring Industries Ltd P.O Box 290 Watford Hertfordshire Wd24 7LA Telephone no. 01923 211151 Fax no. 01923 818564

Reference:

- ◆ Sherbet Pips
- ◆ Type:
- ◆ Type N carpet tiles
- ◆ Classification:
- ◆ BS EN1307 LC3 Grade 4 Heavy contact
- ◆ Width:
- ◆ 50x 50 cm
- ◆ Height:
- ◆ 7.1 mm
- ◆ Colour Pattern:
- ◆ T.B.A
- ◆ For complete technical literature or samples phone
- ◆ 01923 211151 or Email: sales@flooringindustries.co.uk
- ◆ www.flooringindustries.co.uk